

INSTRUCTIONS FOR USE

CHAMPION INDUSTRY CORP. LTD

NO.315, SOUTH ZHONGSHAN ROAD, NANJING CITY JIANGSU CHINA
China

Glove reference : 792498

Article code: /

User notice index : 01

Last update : MARCH 2026

Glove description :


INDUSTRIAL LATEX GLOVES WITH FLOCK LINING

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

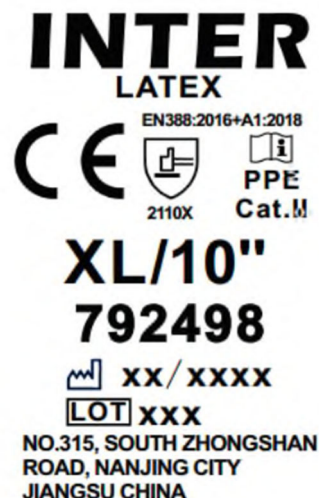

The glove meets the requirements of the standard EN ISO 21420:2020 + A1:2024 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 7/S, 8/M, 9/L, 10/XL

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420+A1 Annex B.

Information about marking

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.



The CE marking means that this product meets the requirements of the regulation 2016/425

Mechanical hazard - EN 388:2016 + A1:2018



2 1 1 0 X

Levels of performance

Abrasion resistance	2	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	1	(on 4 maxi)
Puncture resistance	0	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		



Read carefully the instructions for use provided with the product

Protection limit:

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Contains natural rubber latex, which could cause allergic reactions, including anaphylactic choc.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear...).

Mechanical protection:

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

This glove is not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : www.inter-tools.gr